Interactive spec sheet with links to larger images and spec sheets of accessories



DL254-10-40W-M-A5C5-HO

10" Round Commercial 5 CCT & 5 Wattage Selectable

Project:

Location:

Model: Qty:

Notes:

SPECIFICATION		
Applications	Commercial Recessed Ceiling	
Power Levels (W)	CCT / W	22 | 26 | 30 | 35 | 40
Light Output with White Reflector (lm)	2700K	2240 | 2660 | 3010 | 3500 | 3850
	3000K	2290 | 2720 | 3090 | 3610 | 3980
	3500K	2420 | 2870 | 3260 | 3820 | 4220
	4000K	2470 | 2930 | 3330 | 3880 | 4280
	5000K	2540 | 2990 | 3390 | 3940 | 4360
Color Temperature (K)	5CCT user selectable: 2700-3000-3500-4000-5000 K	
Beam Angle	90°	
CRI	80	
Input	120V-347V AC 50/60 Hz	
Dimming	0 - 10V	
Approved Location	Insulated Ceiling & Wet Locations	
Air Tight	Yes	
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cETLus	
Warranty	5 Year	

DESCRIPTION


All in one 0-10 V dimmable 10" LED downlight for retrofit & new construction.
Perfect for hospitality, healthcare, shopping mall & retail,
office, exterior soffit, etc.

FEATURES & BENEFITS

Universal voltage 120-347 V
0-10 V Dimmable 5%-100%
5 CCT selectable 2700 - 3000 - 3500 - 4000 - 5000 K
5 Wattage Adjustable 22 - 26 - 30 - 35 - 40 W
Type IC, Wet location & Air-tight
Regressed optics with low glare
Trim options: All White, White Trim with Silver (Alzak) reflector, or all Black

DIMENSIONS

ID 8 7/8" OD 11 1/2" Depth 5 3/4" Regressed 2 1/2"
Cut Out 9" to 10" Ceiling Space needed 5 3/4"

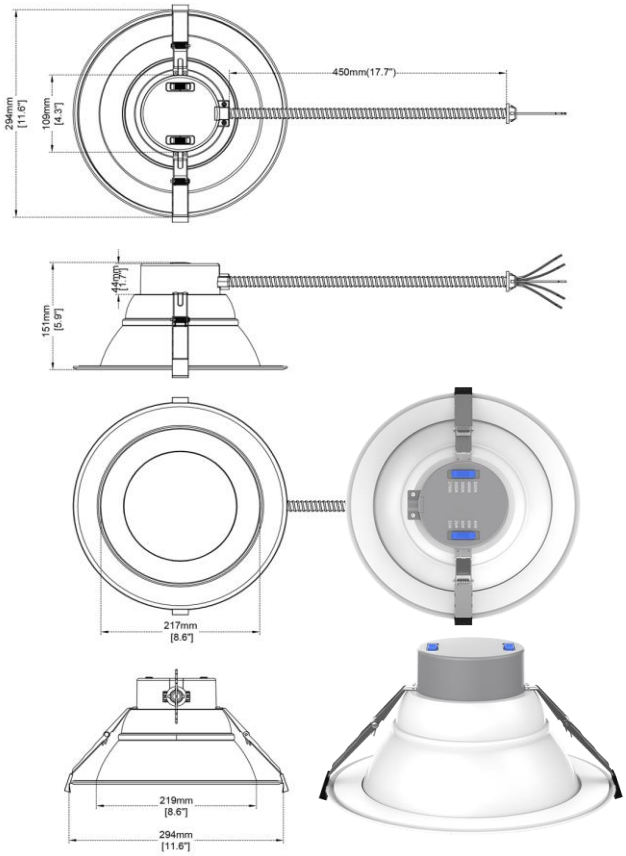

TRIM OPTIONS



White Alzak Black

ACCESSORIES - Sold Separately. **Please note that junction box is not included**



New Construction Mounting Plate for T-bar Ceiling
model # **LBL-MP-C4-10-TBAR**

Goof Ring Round White
ID 10½" OD 14" - model # **GR10-14**
ID 10½" OD 16" - model # **GR10-16**



Goof Ring Square White
ID 10½" OD 14" square - model # **GS10-14**
ID 10½" OD 16" squarec- model # **GS10-16**



Emergency Back Up Drivers
model # **BLD-HM08D-YYY** - provides 8W power
model # **BLD-HM15D-YYY** - provides up to 15W power
Note: 0-10V wires must be connected

ORDERING GUIDE

DL254-10-40W-M-A5C5-HO	White Trim White Reflector
DL254-10-40W-M-A5C5-HO-AZ	White Trim Silver Reflector (Alzak)
DL254-10-40W-M-A5C5-HO-BK	Black Trim Black Reflector

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON