

BLD-HM08D-YYY

Emergency Driver 100-347V 8W



Project: _____

Location: _____

Qty: _____

Notes: _____

DESCRIPTION

100-347V Input Emergency Driver 8W 0-10V Dimmable.

Provides minimum of 90 minutes of emergency power.

Connected fixture could be on, off, switched or dimmed without affecting emergency operation.

Use with switched or un-switched fixtures.

Emergency driver and fixtures must be fed from the same branch circuit.

Does not affect normal operation.

INSTALLATION INSTRUCTIONS


1. Compatible with fixtures using a **0-10V** driver drawing **60W** or less.

0-10V wires must be connected according to the wiring instructions.


Fixture will operate at **8W**.

SPECIFICATIONS	
INPUT VOLTAGE	100-347V AC, 50/60 Hz
INPUT CURRENT	0.1A max
INPUT POWER	12W max
OUTPUT VOLTAGE	170V DC
OUTPUT POWER	8W
COMPATIBILITY	≤ 60W 0-10V DIMMABLE FIXTURES
	≤ 8W NON DIMMABLE FIXTURES
BACK-UP TIME	MINIMUM 90 MINUTES
AMBIENT TEMPERATURE	40°F (5°C) to 120°F (50°C)
APPROVED LOCATIONS	DRY & DAMP
WARRANTY	3 YEAR
CERTIFICATION	c UL us

WIRING WITH 0-10V FIXTURE AND DIMMER

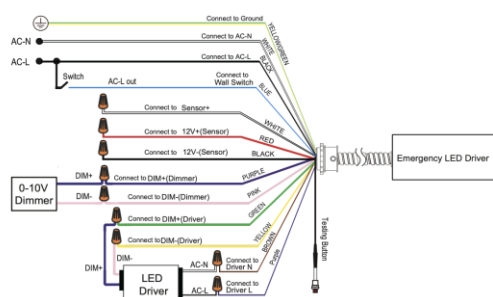


WIRING WITH 0-10V FIXTURE AND WITHOUT DIMMER

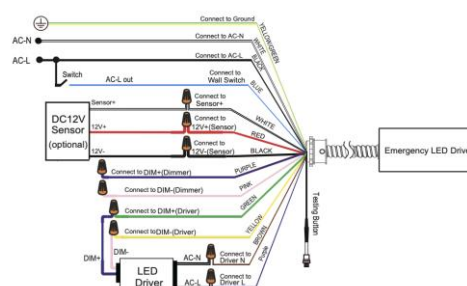

2. Compatible with fixtures using a **TRIAC** driver drawing **8W** or less. Fixture will not be dimmable and will operate at full brightness.

WIRING WITH TRIAC DIMMABLE OR NON DIMMABLE FIXTURE MAXIMUM 8W

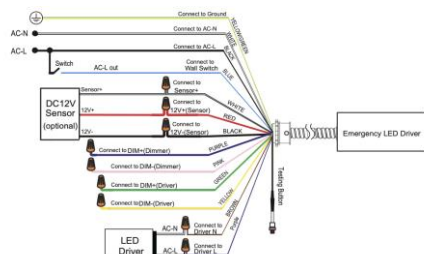

ORDERING GUIDE

model # **BLD-HM08D-YYY**

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON