



LED-1-S6W-G-SQ

2" Square Gimbal Mini Recessed LED 24V AC/DC 6W

Project:

Location:

Model:

Qty:

Notes:

DESCRIPTION

2" Square Gimbal Mini Recessed LED 24V.

Ultra compact, versatile, easily connected via daisy chained low voltage cable to an either remote mounted class 2 power supply or solar inverter.

Die cast aluminum housing

FEATURES & BENEFITS

10° Tilt angle

500 lm with CRI 90+ Comparable to 35W halogen while using 6W

Internal terminal block - No junction box needed


3 1/8" deep - Fits where ceiling space is limited

Fast & easy to install - Save on labor

Type IC rated - No housing required

DIMENSIONS: ID 2 3/8" OD 2 5/8" Square Depth 3 1/8" Cut Out 2 3/8"

Mounting surface from 1/8" to 1 1/2" thick

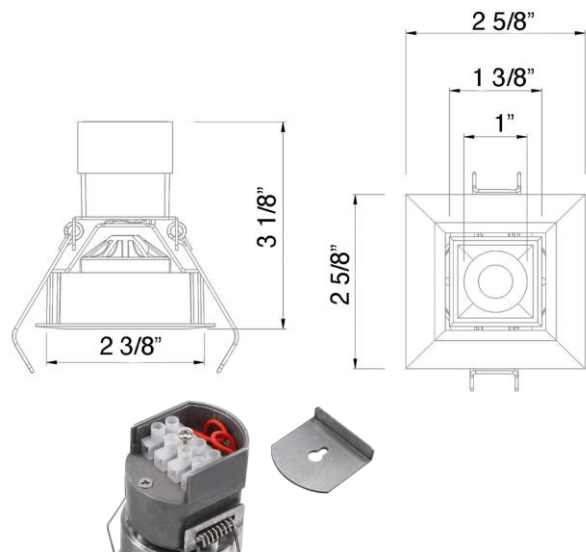

ORDERING GUIDE

	CCT	Trim	Beam Angle
LED-1-S6W-30K-WH-24V-G-SQ	3000K	White	blank for 38°
LED-1-S6W-30K-BK-24V-G-SQ	3000K	Black	-24D for 24°



Other Trim & Light Colors Available By Custom Order

SPECIFICATION	
Applications	Displays, Cabinets, Mini Recessed, Soffits, Solar
Power	6 W
Color Temperature (K)	3000
Light Output (lm)	500
Halogen Equivalent	35 W
Tilt Angle	10°
Beam Angle	38° (standard), 24° available as adder
CRI	90 +
Fixture Input	24V AC / DC
Dimming	Dimmable with external 24V drivers
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	No
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	3 year - when installed with a Lotus LED Lights driver
	The warranty is void if installed with an LED driver from another manufacturer

ACCESSORIES

Sold Separately



[DRIVERS](#)

AVAILABLE STOCK TRIMS




White



Black

Wiring Diagram

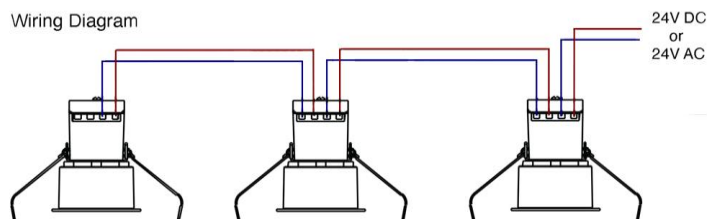

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON