DNA03AT1-600-31B2

Slide Dimmer Triac Forward Phase



Project:

Location:

Qty:

Notes:

SPECIFICATION	
Input Voltage	120V 60Hz
Approved Location	Indoor / dry locations
Minimum / Maximum Load	LED / CFL 3W - 200W
	Incandescent 15W - 600W
Wiring Mode	Single Pole or 3-Way
Neutral Wire Needed	No
Dimming Mode	Forward Phase Cut (Leading Edge)
Operating Temperature	0°C to + 40°C (32°F to 104°F)
Operating Humidity	10% - 90% RH
Certifications	c ETL us
Warranty	3 Year


DESCRIPTION

Slide dimmer for controlling
LED, CFL and incandescent light fixtures


FEATURES & BENEFITS


Rocker Switch & Lever Slider for easy operation
Adjustment Dial for setting the minimum brightness
No Neutral wire needed
Single Pole or 3-Way Wiring
Fits in multi gang boxes without need to break tabs


DIMENSIONS

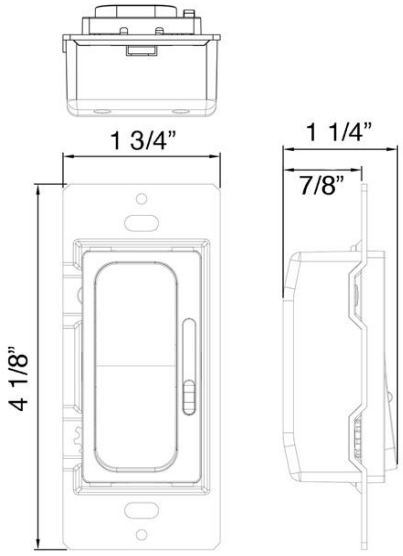


CLICK HERE FOR INSTALLATION INSTRUCTIONS

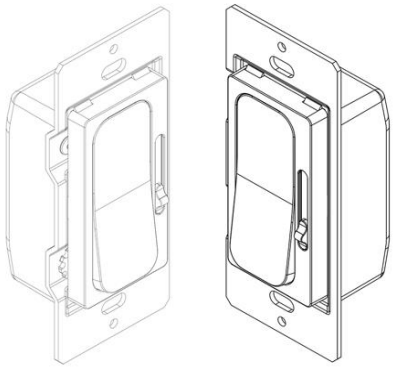

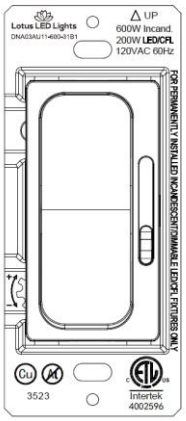

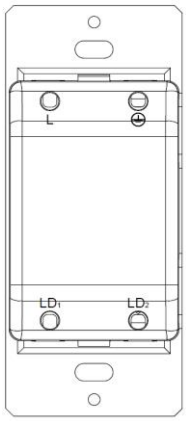





1 Control Lever Slider
- Move the lever slider up to increase the brightness and move down to decrease the brightness.

2 Rocker Switch
- To turn the power ON / OFF by pressing the rocker switch located in the center of the dimmer.

3 Adjustment Dial
- Turn the adjustment dial clockwise to increase the minimum brightness and turn the counter-clockwise to decrease the minimum brightness.

ORDERING GUIDE model **DNA03AT1-600-31B2**

Decora wall plate not included
In stock White Gloss finish
Other finishes available by custom order

CERTIFICATION

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON