



DESCRIPTION

2" Recessed LED With Integral Driver In Connection Box
Interchangeable Reflectors, Trims & Lens Available

FEATURES & BENEFITS

Round, Square & Specialty trims - designer series fixture

1000 lm with **CRI 90+** for True Color Rendering

27K, 30K, 40K, 50CT field selectable & **Dim to Warm 3000-1800K** options

Beam options: **38°** (standard), **24°** & **60°** available as adder

4 3/8" Deep - Install Where Ceiling Space Is Limited

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

Reflectors



2RRWH White **2RRBK** Black **2RRAK** Alzak **2RRBZ** Bronze **2RRCH** Chrome **2RRDM** Diamond **2RRORB** Oil Rubbed Bronze

Round Trims



2RTWH White **2RTBK** Black **2RTBN** Brushed Nickel **2RTBZ** Bronze **2RTCP** Copper **2RTCH** Chrome **2RTORB** Oil Rubbed Bronze

Square Trims



2STWH White **2STBK** Black **2STBN** Brushed Nickel **2STBZ** Bronze **2STCP** Copper **2STCH** Chrome

Specialty Trims - in stock White & 3 Black, other colors available by custom order



2RPH Pinhole **2RSA** Slot Aperture **2RWW** Wall Wash **2RSH** Square Hole **2RST** Shower Trim **2RPH-BK** Black PH & ST & SH **2RST-BK** Black PH & ST & SH **2RSH-BK** Black PH & ST & SH

ORDERING GUIDE	CCT	Reflector	Trim	Beam Angle
LED-2-S15W	- xxK	- 2RRxx	- 2xxx	blank for 38°
	27 30 40 50CT 3018			-24D for 24°
				-60D for 60°

Example:

LED-2-S15W **- 30K** **- 2RRWH** **- 2RTWH**
3000K Reflector Round Trim
White **White**

Default beam angle is 38°, Optional are 24° & 60°

LED-2-S15W

2" Round / Square Recessed LED 15W High Output Designer Series

Project:

Location:

Trim:


Reflector:

Qty:

Notes:


SPECIFICATION	
Applications	Commercial & High End Residential
Power	15 W
Color Temperature (K)	2700 3000 4000 50CT: 27K-30K-35K-40K-50K 3018
Light Output (lm)	980 1000 1020 820-880-960-1000-960 800
Halogen Equivalent	100 W
Beam Angle	38° standard 24° & 60° optional
CRI	90 +
Default Driver	120V AC Triac Dimmable
Optional Driver	120-347V AC 0-10V Dimmable
J-Box Volume	6.53 in ³ / 2 in 2 out 12AWG
Approved Location	Insulated Ceiling & Damp Locations / Wet with 2RST trim
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, T24
Warranty	5 Year

DIMENSIONS: ID 1 7/8" ; OD 3 1/8" ; Cut Out Needed For Driver 2 1/2"
Ceiling Clearance Required: 5 1/2" 120V Triac Dim Driver Included

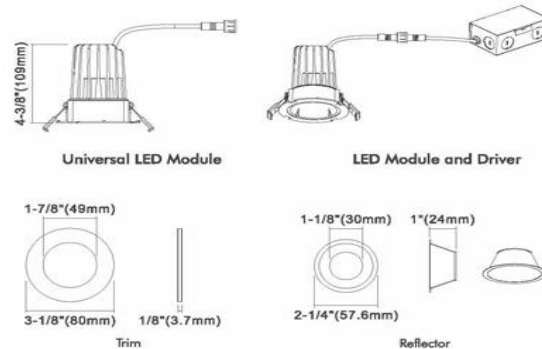

ACCESSORIES

Sold Separately



[Flanged Mounting Plate with bars model FRP212](#)

[13" Mounting Plate model MP234](#)

[26" Rough-In Plates - model # RIP212](#)



[Jumper Cables for single CCT & DTW model JC10](#)

[Jumper Cables for 5 CCT model JC-5CCT-10](#)

[Goof Ring OD 4 1/2" White # GR3 Black # GR3-BK](#)



0-10V Dimmable driver 120-347V

[for 50CT model HBL015-AW-10-01A-5CS](#)

[for single CCT & DTW model HBL015-AW-10-01L](#)



Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)

[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090

Delta BC & Mississauga ON