

6" Round Ultimate Super Thin Recessed LED 17W



Type IC, Wet & Air-Tight

DESCRIPTION

6" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Wider Trim - No Goof Rings Needed For Covering Old 6" Holes
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required
CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

DIMENSIONS ID 6 1/8" OD 7 1/2" Cut Out 6 1/4" to 6 1/2"

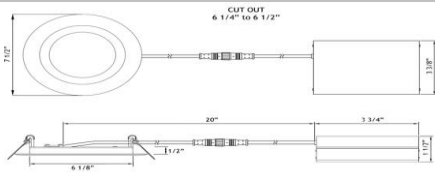


120V TRIAC Dimmable
Driver Included

Optional 120V - 347V
Driver 0-10V Dimmable



Order Separately as
model # **LLL-LD2050T**

AVAILABLE TRIMS



ORDERING GUIDE

Example: **LL6R - 30K - WH**

	CCT	Trim Finish	
LL6R	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K	BN	Brushed Nickel
5000K	50K	BC	Brushed Copper
DTW 28-20	28K	Dim to Warm 2800K to 2000K WH	Trim Only
DTW 35-20	35K	Dim to Warm 3500K to 2000K WH	Trim Only

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	17 W	
Colour Temperature	2700 3000 4000 5000 DTW 28-20 DTW 35-20	
Light Output	950 980 1000 1050 950 980	
Halogen Equivalent	100 W	
Beam Angle	110°	
CRI	90 +	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Fixture Weight	0.75 lbs	
Power Factor	0.98	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus, T24	
Warranty	10 Year on Residential	

ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed
[6ft - model # EXC6](#)
[20ft - model # EXC20](#)



[26" Long Flat Rough-In Plate - model # RIP612](#)



[13" Flat Rough-In Plate - model # MP6-2](#)



[Flanged Plate with Hanger Bars - model # FRP6](#)



[Goof Ring OD 7 5/8" White # GR6 Black # GR6-BK](#)



Emergency Back Up Driver
[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)
NOTE: Compatible only if 0-10V driver
is used and 0-10V wires connected
[model # LLL-LD2050T](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON