Interactive spec sheet with links to larger images and spec sheets of accessories

SC-8-10-TT-9

Tape to Tape 90° Screw Connector



Project:

Location:

Qty:

Notes:

DESCRIPTION

Tape to Tape 90° Screw Connector for 8mm & 10mm tape light

ORDERING GUIDE

MODEL # **SC-8-10-TT-9**


[INSTALLATION INSTRUCTIONS]

Packaging: Individually packaged with installation instructions

Specification

Input voltage	IP rating	Rated current	Product dimension	Under Materials	Working environment	Installation method
12VDC / 24VDC	IP20	10A	15.4mm*15.4mm*6.6mm	Heat Resistant PC +65% copper	-10°~45°	Screws


Installation

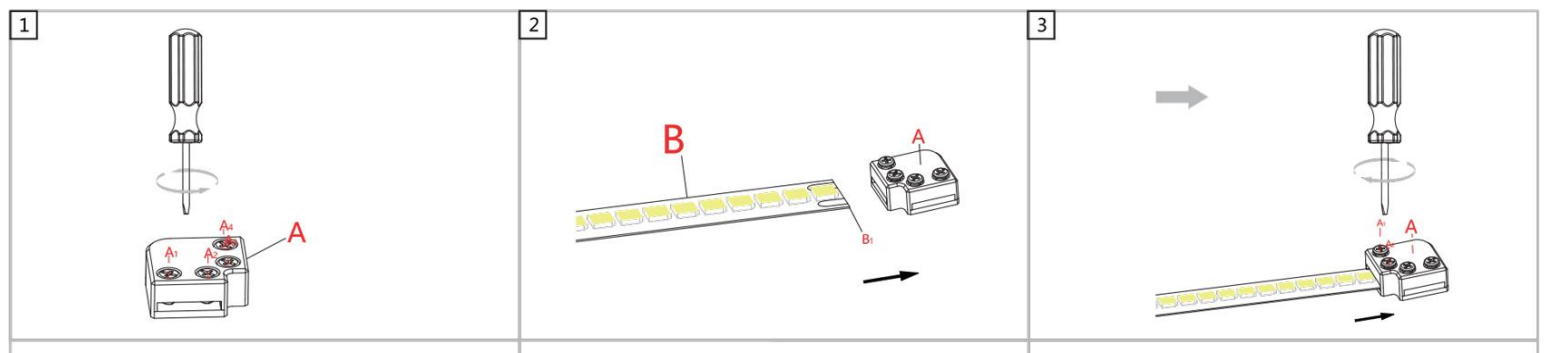

1. Unscrew the 4 screws of the connector (A)

2. Insert the end of LED tape light (B) into the connector opening (A). Align the connection points (B1 & B2) to be right under the screws (A1 & A2)

3. Screw down the 2 screws (A1 & A2) until firm contact with the LED tape is secured. Do not over tight

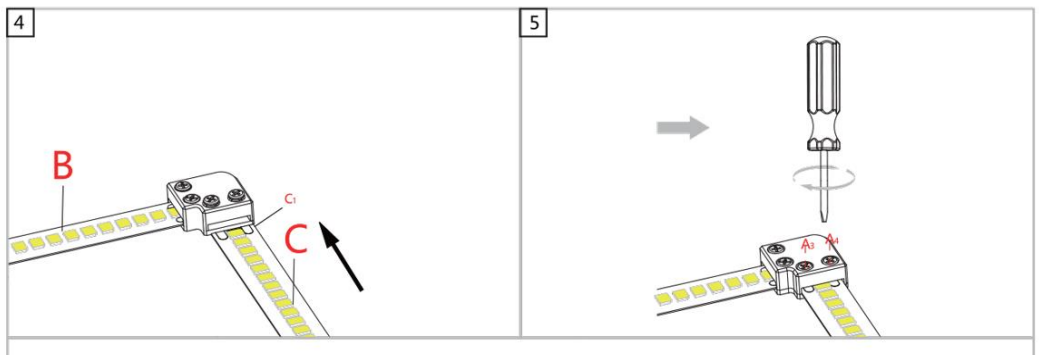


4. Insert the other end of the tape light and repeat steps 3 & 4. Make sure polarity of both tapes match on both sides of the connector(+ with + and - with -)

NOTE:

These connectors also fit into the new aluminum profiles LH-1708 and LH-2408, although the diffuser has to be pushed hard and the double adhesive tape removed from the back of the connectors

DIMENSIONS

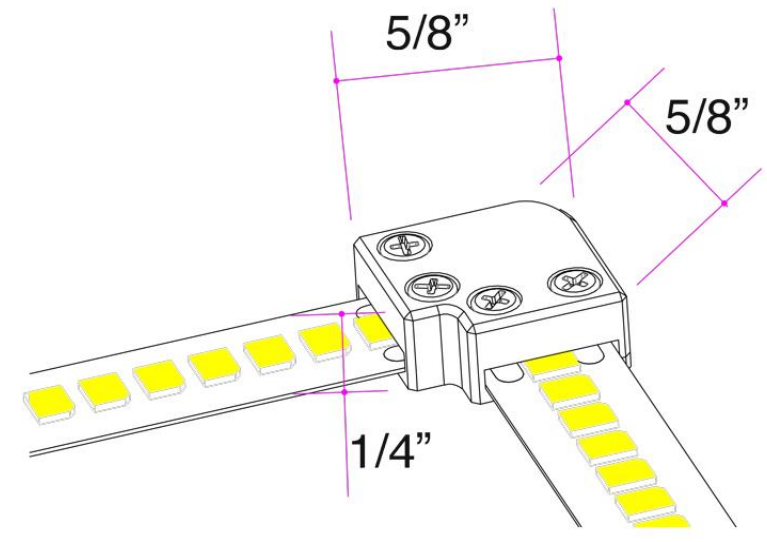

Lotus LED Lights USA	www.LotusLEDLights.com	**Lotus LED Lights CANADA**
250 H Street # 301, Blaine WA 98230 tel 360-200-5500	mailing addresses	1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Hainesport NJ, Naples FL, Vancouver WA	warehouses	Delta BC & Mississauga ON