




DESCRIPTION

All in one 0-10 V Dimmable 4" LED downlight for retrofit & new construction.
Perfect for hospitality, healthcare, shopping mall & retail,
office, exterior soffit, etc.

FEATURES & BENEFITS

Universal voltage 120-347 V
0-10 V Dimmable 5%-100%
5 CCT selectable 2700 - 3000 - 3500 - 4000 - 5000 K
5 Wattage Adjustable 6 - 8 - 10 - 12 - 16 W
Type IC, Wet location & Air-tight
Regressed optics with low glare
Trim options: All White, White Trim with Silver (Alzak) reflector, or all Black

DIMENSIONS ID 3 3/4" OD 6" Depth 4 1/8" Regressed 1 3/8"
Cut Out 4" to 5" Ceiling Space needed 4"

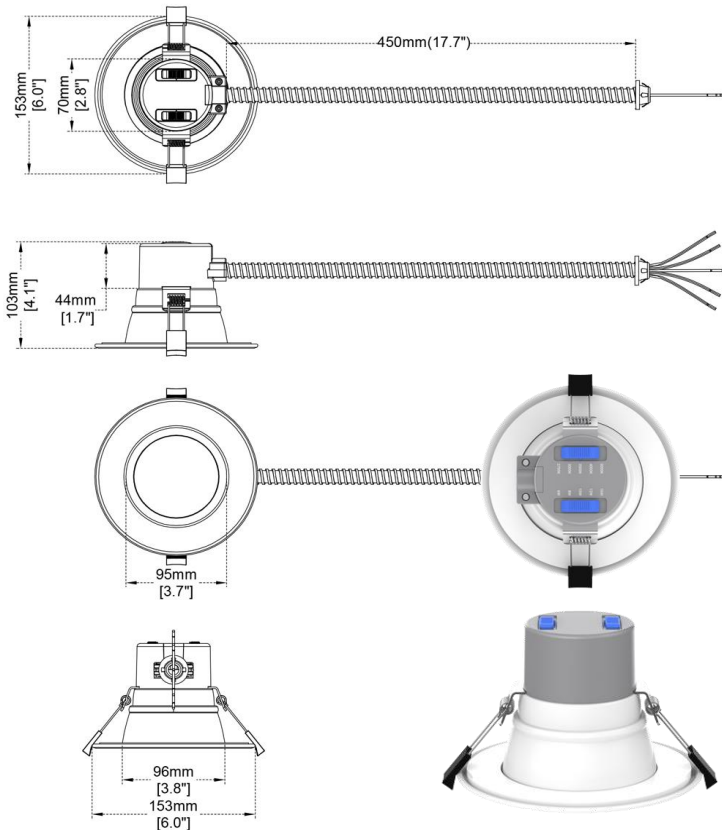

ORDERING GUIDE

DL254-4-16W-M-A5C5 [White Trim White Reflector](#)
DL254-4-16W-M-A5C5-AZ [White Trims Silver Reflector \(Alzak\)](#)
DL254-4-16W-M-A5C5-BK [Black Trim Black Reflector](#)

DL254-4-16W-M-A5C5

4" Round Commercial 5 CCT & 5 Wattage Selectable

Project:

Location:

Qty:

Notes:

SPECIFICATION	
Applications	Commercial Recessed Ceiling
Power Levels (W)	CCT / W 6 8 10 12 16
with Light Output Reflector (lm)	2700K 570 790 1010 1190 1490
	3000K 580 810 1040 1230 1550
	3500K 600 850 1090 1290 1640
	4000K 620 870 1120 1320 1660
	5000K 640 890 1140 1320 1670
Color Temperature (K)	5CCT user selectable: 2700-3000-3500-4000-5000 K
Beam Angle	80°
CRI	80
Input	120V-347V AC 50/60 Hz
Dimming	0 - 10V
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year

TRIM OPTIONS



White



Alzak



Black

ACCESSORIES - Sold Separately. **Please note that junction box is not included**



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



[Stud Mounting Plate model # LBL-MP-C4-8-STUD](#)



[T-bar mounting plate model # LBL-MP-C4-10-TBAR](#)



Goof Ring White OD 8 1/2" model # LBL-4CGR-W



Emergency Back Up Drivers

[model # BLD-HM08D-YYY - provides 8W power](#)

[model # BLD-HM15D-YYY - provides up to 15W power](#)

Note: 0-10V wires must be connected

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON