


DESCRIPTION

All in one 0-10 V dimmable 6" LED downlight for retrofit & new construction.
Perfect for hospitality, healthcare, shopping mall & retail,
office, exterior soffit, etc.

FEATURES & BENEFITS

Universal voltage 120-347 V
0-10 V Dimmable 5%-100%
5 CCT selectable 2700 - 3000 - 3500 - 4000 - 5000 K
5 Wattage Adjustable 12 - 16 - 22 - 26 - 30 W
Type IC, Wet location & Air-tight
Regressed optics with low glare
Trim options: All White, White Trim with Silver (Alzak) reflector, or all Black

DIMENSIONS ID 6" OD 8 1/4" Depth 4 3/4" Regressed 2"
Cut Out 6" to 7" Ceiling Space needed 4 3/4"

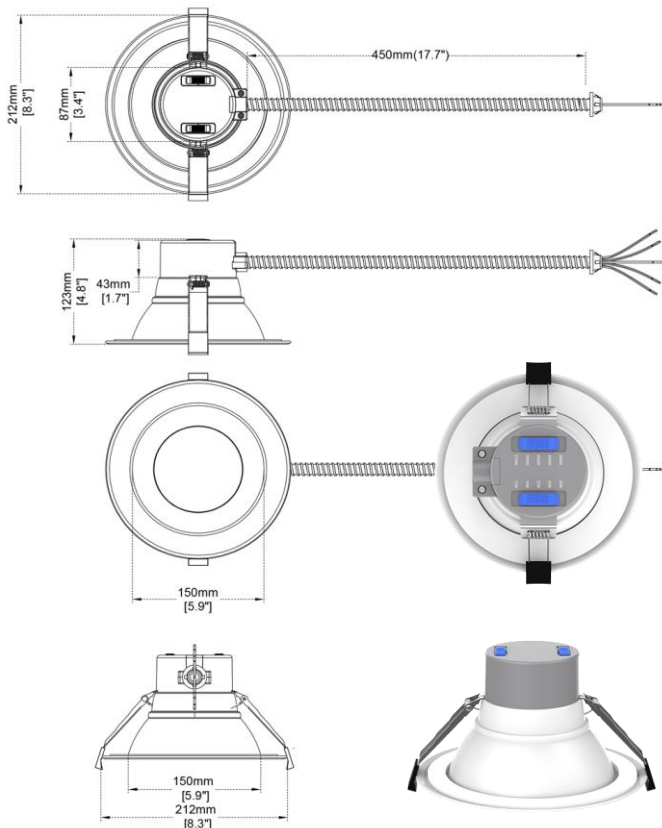

ORDERING GUIDE

DL254-6-30W-M-A5C5-HO [White Trim White Reflector](#)
DL254-6-30W-M-A5C5-HO-AZ [White Trims Silver Reflector \(Alzak\)](#)
DL254-6-30W-M-A5C5-HO-BK [Black Trim Black Reflector](#)

DL254-6-30W-M-A5C5-HO

6" Round Commercial 5 CCT & 5 Wattage Selectable

Project:

Location:

Model:

Qty:

Notes:

SPECIFICATION						
Applications	Commercial Recessed Ceiling					
Power Levels (W)	CCT / W	12	16	22	26	30
with Light Output Reflector (lm)	2700K	1310	1760	2300	2750	3010
	3000K	1350	1820	2390	2760	3200
	3500K	1420	1920	2530	2920	3390
	4000K	1460	1970	2580	2970	3410
	5000K	1510	2020	2650	3030	3450
Color Temperature (K)	5CCT user selectable: 2700-3000-3500-4000-5000 K					
Beam Angle	85°					
CRI	80					
Input	120V-347V AC 50/60 Hz					
Dimming	0 - 10V					
Approved Location	Insulated Ceiling & Wet Locations					
Air Tight	Yes					
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)					
Projected Life	70% Light Output at 50,000 Hours					
Certification	cETLus					
Warranty	5 Year					

TRIM OPTIONS



White



Alzak



Black

IS - Sold Separately. **Please note that junction box is not included**



[Flanged Plate with Hanger Bars - model # FRP6](#)



[26" Flat Rough-In Plates model # RIP6](#)



[13" Mounting Plate Flat model # MP6-2](#)



[Stud Mounting Plate model # LBL-MP-C4-8-STUD](#)



[T-bar mounting plate model # LBL-MP-C4-10-TBAR](#)



Black trim cover model # **LBL-6CRT-B**



Silver trim cover model # **LBL-6CRT-S**



Goof Ring White OD 10 1/2" model # **LBL-6CGR-W**



Emergency Back Up Drivers

model # **BLD-HM08D-YYY** - provides 8W power

model # **BLD-HM15D-YYY** - provides up to 15W power

Note: 0-10V wires must be connected

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090

Delta BC & Mississauga ON