



DESCRIPTION


2" Square Gimbal Recessed LED
With Integral Driver In Connection Box

FEATURES & BENEFITS

Up to 20° tilt for sloped ceilings and wall washing
5CCT user selectable 2700-3000-3500-4000-5000K or **Dim to Warm** 3000-1800K
Light output up to **850 lm**
CRI 90+ for True Color Rendering
5" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Wet Location Approved
Driver Inside Connection Box - No Junction Box Needed
120V Triac Dimmable or **120-347V 0-10V** Dimmable Drivers

DIMENSIONS: ID 2 1/2" OD 3 1/8" Square Cut Out 2 5/8"

Ceiling Clearance Required: 5" 120V Triac Dim Driver Included

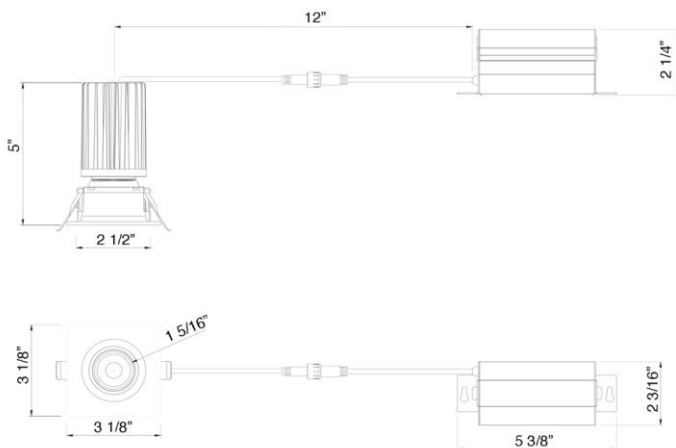

ORDERING GUIDE

	CCT	Trim	Beam Angle
LED-2-S11W-5CCT-WH-EY-SQ	5CCT	White	blank for 38°
LED-2-S11W-DTW-WH-EY-SQ	Dim to Warm	White	-24D for 24°
LED-2-S11W-5CCT-BK-EY-SQ	5CCT	Black	-60D for 60°
LED-2-S11W-DTW-BK-EY-SQ	Dim to Warm	Black	
LED-2-S11W-5CCT-ORB-EY-SQ	5CCT	Oil Rubbed Bronze	
LED-2-S11W-DTW-ORB-EY-SQ	Dim to Warm	Oil Rubbed Bronze	

Default beam angle is 38°, Optional 24° & 60°



LED-2-S11W-EY-SQ

2" Square Gimbal LED 11W

Project:

Location:


Model:

Qty:

Notes:

SPECIFICATION	
Applications	General Lighting, Sloped Ceilings, Highlighting Artwork
Power	11 W
Color Temperature (K)	2700K - 3000K - 3500K - 4000K - 5000K - DTW 30-18K
Light Output White Trim (lm)	700 - 740 - 820 - 850 - 850 - 900
Halogen Equivalent	90 W
Beam Angle	38° (standard), 24° & 60° available as adder
Tilt Angle	20°
CRI	90 +
Default Driver Input & Dimming	120V AC 50/60 Hz - Triac Dimmable
Optional Driver Input & Dimming	120V-347V AC 50/60 Hz - 0-10V Dimmable
J-Box Volume	6.53 in ³ / 2 in 2 out 12AWG
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year

AVAILABLE TRIMS

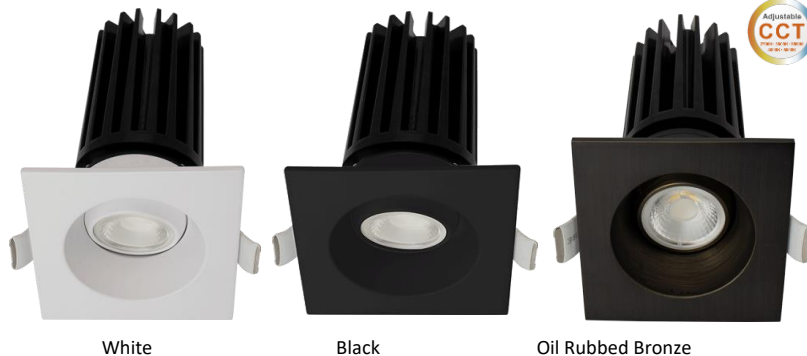

White

Black

Oil Rubbed Bronze

ACCESSORIES

Sold Separately



[Flanged Mounting Plate with bars model FRP212](#)



[Flat Mounting Plate model RIP212](#)



[Jumper Cables 10 ft 5CCT model JC-5CCT-10](#)
[Jumper Cables 10 ft DTW model JC-10](#)



[0-10V Driver 120-347V for 5CCT HBL012-AW-10-01A-5CS](#)
[0-10V Driver 120-347V for DTW HBL012-AW-10-01L](#)



Emergency Back Up Drivers
[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)
[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON