

**LL4G****4" Eyeball Round Recessed Gimbal LED 11.4W**

Project:

Location:

Model #:

Qty:

Notes:

DESCRIPTION

4" Eyeball Round Recessed Gimbal LED 11.4W
With Integral Driver In Connection Box
Adjustable Yet Air-Tight Without Housing Needed

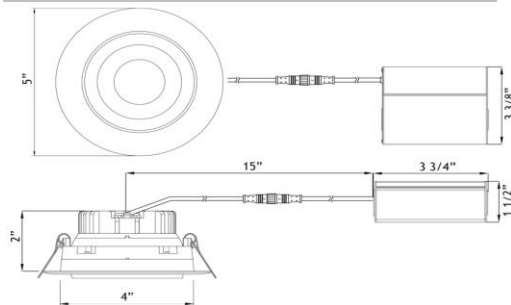
FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
Driver Inside Connection Box - No Junction Box Needed
Directional Beam - Great for Sloped Ceilings and Artwork
CRI 90+ for True Color Rendering
Available in single CCT, Dim to Warm 30-20K & 30-18K, & 5CCT

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2 1/2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/2"

**AVAILABLE TRIMS**

White Black Brushed Nickel Oil Rubbed Bronze

Default White trim is Signal RAL9003. Optional is Beige RAL9001

ORDERING GUIDE Example **LL4G-30K-WH**

	CCT	Trim Finish	Beam
LL4G	- xxK	- xx	blank for 38°
2700K	27K	WH	White
3000K	30K	BK	Black
3500K	35K	BN	Brushed Nickel
4100K	41K	ORB	Oil Rubbed Bronze
5000K	50K		
DTW 30K-20K	32K	Dim to Warm 3000K to 2000K	
DTW 30K-18K	3018K	Dim to Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	

SPECIFICATION

Applications	Sloped Ceilings, Highlighting Artwork						
Energy Used	11.4 W						
Color Temperature (K)	2700	3000	3500	4100	5000	DTW 30-20	DTW 30-18
Light Output (lm)	960	1000	1020	1050	1100	800	980
Beam Angle	38° standard / 60° custom						
Tilt	20° tilt and 360° rotation						
CRI	90 +						
Default Driver Input	120V AC			Triac Dimmable			
Optional Driver Input	120V-347V AC			0-10V Dimmable			
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG						
Power Factor	0.95						
Approved Location	Insulated Ceiling & Wet Locations						
IP Rating	IP 54						
Air Tight	Yes						
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)						
Projected Life	70% Light Output at 50,000 Hours						
Certification	cULus, T24						
Warranty	10 Year Residential / 5 Year Commercial						

120V TRIAC Dimmable Driver Included

Optional 120V - 347V Driver
0-10V Dimmable



[model # LLL-LD1025T](#)

ACCESSORIES

Sold Separately

Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)

[20ft - model # EXC20](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[Flanged Plate with Hanger Bars model # FRP4](#)



[Goof Ring OD 5 3/4" model # GR4](#)



Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)

[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON