Interactive spec sheet with links to larger images and spec sheets of accessories

EMB-SF001

Emergency Battery Backup for ADS7R9

Project:

Location:

Qty:

Notes:



DESCRIPTION


Emergency battery backup for 7" slim surface LED model ADS7R9
Guarantees 2 hours operation from battery in case of power outage

FEATURES & BENEFITS

Self test function
Switch time less then 1 second
Over charge / discharge protection
Durable die-cast aluminum with Li-ion battery
3 hours operating for model ADS7R9 at around 50% brightness
Photometric files for initial brightness, after 30 minutes and
after 90 minutes discharging available on our website


SPECIFICATION	
Applications	Healthcare, Offices, Hotels, Hospitality, etc.
Input Voltage	120 V AC 50/60 Hz
Charging Time	24 hours
Charging Current	185 mA
Switching Time	< 1 second
Output Voltage	65 V DC
Discharging Time	3 hours with 2 hours guaranteed
Brightness	around 50% of the full power
Output Current	45 mA
Output Power	3 W
Approved Location	Damp
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Certification	cETLus
Battery Life	500 Charging Cycles
Warranty	5 Year

DIMENSIONS OD 8" Thickness 1"

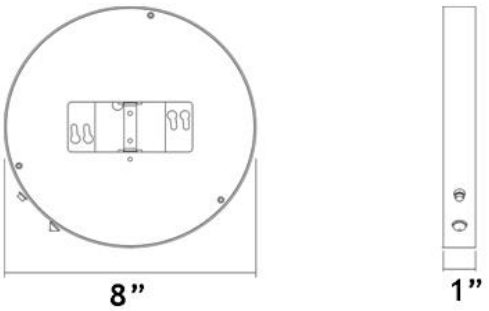



INSTALLATION INSTRUCTIONS

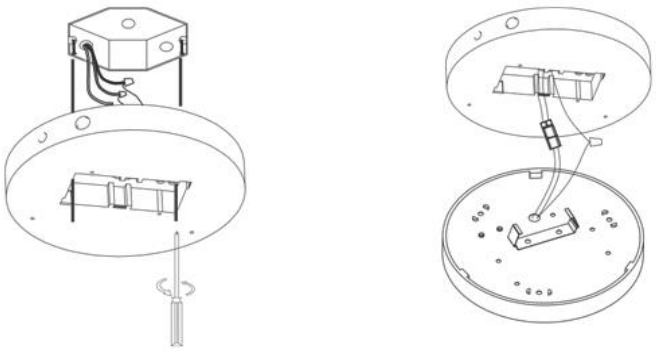

ACCESSORIES Sold Separately



Empty Surface Mount Backbox of EMB-SF001
model # EMBS

COMPATIBLE FIXTURE **ADS7R9**

Please note that only the single CCT 3000K and 4000K versions are compatible
ADS7R9-5CCT is NOT compatible

ORDERING GUIDE model **EMB-SF001**

Lotus LED Lights USA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com
mailing addresses
warehouses

Lotus LED Lights CANADA
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC, Mississauga ON