


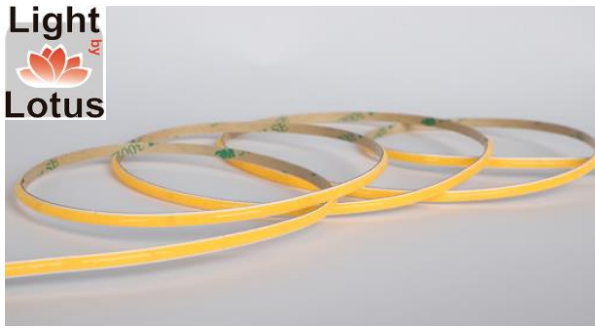

DESCRIPTION

COB LED 4 mm wide super flexible strip 24V for dry locations
Seamless linear light - no diffused cover needed
No hotspots and with CRI 90+ for vibrant colors
Higher efficiency and more flexible than SMD LED strips
Easy to install and low maintenance
Double sided adhesive 3M tape and wires on both ends

APPLICATIONS


Cove and decorative lighting, path and contour marking
Undercabinet and valance use
Suitable for installation in the storage area of a clothes closet

INSTALLATION INSTRUCTIONS

1. Remove backing paper to reveal adhesive tape

2. Press LED tape firmly onto clean smooth surface that adsorbs heat, such as metal or glass. Start at one end and gradually move along surface, making sure tape is smooth and not creased

3. Cut on trim marks

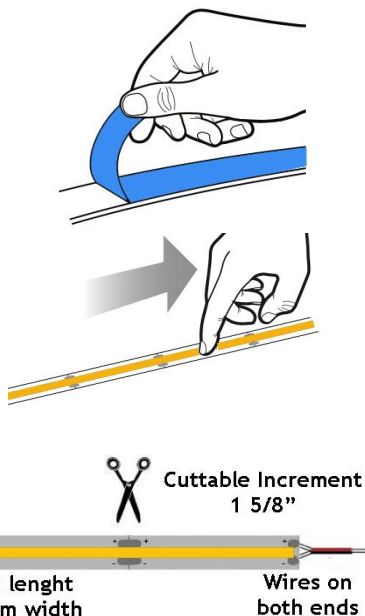

WARNING

LED tape gets hot. Mounting firmly and securely on smooth and thermo conductive surface such as metal or glass is critical for proper thermal management and long life. Not following these instructions voids the warranty

ORDERING GUIDE

2700K	LBL-COB-384-24V-4MM-27K-16FT-IP20
3000K	LBL-COB-384-24V-4MM-30K-16FT-IP20
4000K	LBL-COB-384-24V-4MM-40K-16FT-IP20

LBL-COB-384-24V-4MM-16FT-IP20

COB LED Strip 24V 1.5W/ft 16ft long 4mm wide IP20

Project:

Location:

Model # :

Qty:

Notes:

SPECIFICATION (tolerance +/- 10%)

Applications	Undercabinet, Cove, Valance, Decorative		
Color Temperature (K)	2700	3000	4000
Power	1.5 W/ft		
Efficiency	80 lm/W		
Light output	120 lm/ft		
Length per roll	16.4 ft / 5 meters		
Maximum Length	16.4 ft / 5 meters		
Width	5/32" / 4 mm		
Power per Max Length	25 W		
Lumen per Max Length	2,000 lm		
Beam Angle	180°		
CRI	90 +		
Input	24V DC		
Dimmable	Yes		
LED Operation Type	Constant Voltage		
IP Grade	IP 20		
Approved Location	Indoor / Dry Location / Clothes Closets		
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)		
Cuttable Increment	1 5/8"		
LEDs density	384 LEDs / meter		
Adhesive Tape Type	3M 300SE		
Projected Life	70% Light Output at 20,000 Hours		
Certification	cETLus		
Warranty	3 year - when installed with a Lotus LED Lights driver		
	The warranty is void if installed with an LED driver from another manufacturer		

ACCESSORIES

Sold Separately



Strip Connector 4 mm Tape to Tape # **LCS-0-4MM**

Strip Connector 4 mm Tape to Wire # **LCS-1-4MM**

Strip Connector 4 mm Tape to Tape with Wire # **LCS-2-4MM**

RECOMMENDED DRIVERS

[KVG-24030-DWJ](#)

[KVG-24060-DWJ](#)

[KVG-24096-DWJ](#)

[KVG-C24192-DWJ](#)

[KVG-C24288-DWJ](#)

[SDD-24060-DIM](#)

[SDD-24096-DIM](#)



30W 5-in-1 Dimmable

60W 5-in-1 Dimmable

96W 5-in-1 Dimmable

192W 5-in-1 Dimmable

288W 5-in-1 Dimmable

60W 2-in-1 driver + dimmer

96W 2-in-1 driver + dimmer

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON