



LY4RCS

4" Round Original Super Thin Recessed LED 9W



Type IC, Wet & Air-Tight

DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can



FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists -
Maximum Layout Flexibility
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

DIMENSIONS: ID 4 1/8" OD 4 3/4" Cut Out 4 1/8" to 4 1/4"

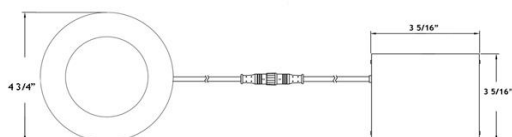

120V TRIAC Dimmable
Driver Included

Optional 120V - 347V
Driver 0-10V Dimmable
Order Separately as
[model # LLL-LD1535T](#)



AVAILABLE TRIMS



White



Black



Brushed Nickel

ORDERING GUIDE Example: **LY4RCS / 30K / WH**

	CCT	Trim Finish	
LY4RCS	/	/	
3000K	30K	WH	White
4100K	41K	BK	Black
		BN	Brushed Nickel

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	9 W	
Colour Temperature	3000	4100
Light Output	550	600
Halogen Equivalent	50 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.98	
Approved Location	Insulated Ceilings, Open Plenum, Wet	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus	
Warranty	10 Year Residential / 5 Year Commercial	

ACCESSORIES

Sold Separately

Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)

[20ft - model # EXC20](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[Flanged Plate with Hanger Bars model # FRP4](#)



[Goof Ring OD 5 3/4" model # GR4](#)



Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)

[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON