



Lotus
LED
Lights



Type IC, Air-Tight, Wet & Plenum

DESCRIPTION

4" Round Recessed LED With Built-In Driver
Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Type IC Rated - No Housing Required
CRI 90+ for True Color Rendering
Fast & Easy To Install - Save On Labor
Connection Box Included - No Junction Box Needed
Armored Cable - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With
Attached Spring Clips. Ceiling Clearance Required: 2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/4"

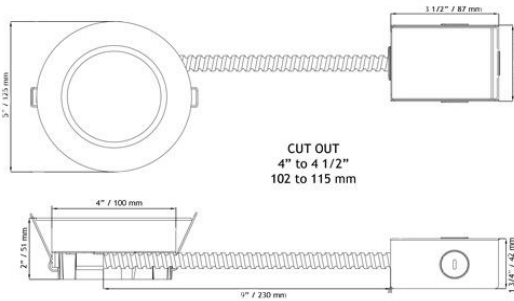

AVAILABLE TRIMS



White



Black

ORDERING GUIDE Example: LL4RRG - 30K - WH

	CCT	Trim Finish	
LL4RRG	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4100K	41K		

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

LL4RRG

4" Round Regressed 1st Gen Plenum LED 14.5W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling Mount		
Energy Used	14.5 W		
Color Temperature	2700	3000	4100
Light Output	850	860	900
Halogen Equivalent	75 W		
Beam Angle	90°		
CRI	90 +		
Input Voltage	120V AC 50/60 Hz		
Dimming	TRIAC Dimmers 5%-100%		
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG		
Power Factor	0.98		
Approved Location	Insulated Ceilings, Open Plenum, Wet		
IP Rating	IP 54		
Air Tight	Yes		
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)		
Projected Life	70% Light Output at 50,000 Hours		
Certification	cULus		
Warranty	5 Year		

ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[Flanged Plate with Hanger Bars model # FRP4](#)



[Goof Ring OD 5 3/4" model # GR4](#)

COMPLIANCE



Type IC
Air-Tight
Open Plenum

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON