

**LB4R****4" Round Economy Super Thin Recessed LED 11W****Type IC, Wet & Air-Tight****DESCRIPTION**

4" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists -
Maximum Layout Flexibility
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

DIMENSIONS: ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

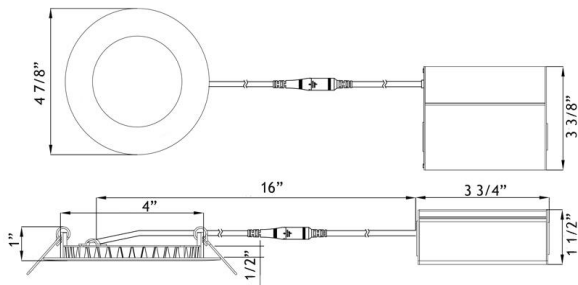

120V TRIAC Dimmable

Driver Included



Optional 120V - 347V

Driver 0-10V Dimmable
Order Separately as
[model # LLL-LD1535TB](#)

**AVAILABLE TRIMS**

White



Black

ORDERING GUIDE Example: **LB4R / 30K / WH**

	CCT	Trim Finish	
LB4R	/	/	
3000K	30K	WH	White
4100K	41K	BK	Black
DTW 30-20K	32K	Dim to Warm 3000K to 2000K	

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	11 W	
Colour Temperature	3000 4100 Dim to Warm	3000K to 2000K
Light Output	700 730 700	
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 36,000 Hours	
Certification	cULus	
Warranty	5 Year	

ACCESSORIES

Sold Separately



Low Voltage Extension Cables 10 ft FT4 / CMR rated
[model # EXC10](#)



[26" Long Flat Rough-In Plate model # RIP414](#)



[13" Long Flat Rough-In Plate model # MP4-2](#)



[13" Long Flanged Rough-In Plate model # MP4](#)



[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)



Goof Ring OD 5 3/4"
[White model # GR4](#) [Black model # GR4-BK](#)



Emergency Back Up Drivers
[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)
[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON