



DESCRIPTION

2" Round Recessed Economy LED With Integral Driver In Connection Box
Available with White & Black trims and 4 Smooth & 2 Baffle Reflectors

FEATURES & BENEFITS

5 CCT User Selectable
CRI 90+ for True Color Rendering
Type IC Rated - No Housing Required
Fast & Easy To Install - Save On Labor
2 3/4" Deep - Install Where Ceiling Space Is Limited
120V Triac Dimmable Driver with Wiring Compartment Included

DIMENSIONS Fixture: OD 3 1/8" ID 2 1/16" Depth 2 3/4"
Driver: 5 1/4" x 1 3/4" x 1 1/8" Cut Out: 2 1/2" to 2 3/4"

TRIM & REFLECTOR OPTIONS



ORDERING GUIDE

Trim Reflector Beam

JXL-COB02-R09W-5CCT-WH-2RR-SM-WH	White	Smooth White	blank for 36°
JXL-COB02-R09W-5CCT-WH-2RR-BF-WH	White	Baffle White	-24D for 24°
JXL-COB02-R09W-5CCT-WH-2RR-SM-BK	White	Smooth Black	
JXL-COB02-R09W-5CCT-WH-2RR-BF-BK	White	Baffle Black	
JXL-COB02-R09W-5CCT-WH-2RR-SM-AZ	White	Alzak	
JXL-COB02-R09W-5CCT-WH-2RR-SM-BC	White	Black Chrome	
JXL-COB02-R09W-5CCT-BK-2RR-SM-WH	Black	Smooth White	
JXL-COB02-R09W-5CCT-BK-2RR-BF-WH	Black	Baffle White	
JXL-COB02-R09W-5CCT-BK-2RR-SM-BK	Black	Smooth Black	
JXL-COB02-R09W-5CCT-BK-2RR-BF-BK	Black	Baffle Black	
JXL-COB02-R09W-5CCT-BK-2RR-SM-AZ	Black	Alzak	
JXL-COB02-R09W-5CCT-BK-2RR-SM-BC	Black	Black Chrome	

JXL-COB02-R09W-5CCT

2" Round Recessed Economy LED 9W 5CCT

Project:

Location:

Model:


Qty:

Notes:

SPECIFICATION

Applications	Residential Recessed				
Power	9 W				
Color Temperature (K)	2700	3000	3500	4000	5000
Light Output WH Reflector (lm)	560	590	630	660	690
Light Output BK Reflector (lm)	510	550	580	610	620
Beam Angle	36° standard, 24° custom				
CRI	90 +				
Driver Input	120V AC 50/60 Hz				
J-Box Volume	3.88 in ³				
Dimming	TRIAC Dimmers 20% - 100%				
Approved Location	Insulated Ceiling & Damp Locations				
Air Tight	Yes				
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)				
Projected Life	70% Light Output at 30,000 Hours				
Certification	c ETL us				
Warranty	3 Year				

INSTALLATION INSTRUCTIONS

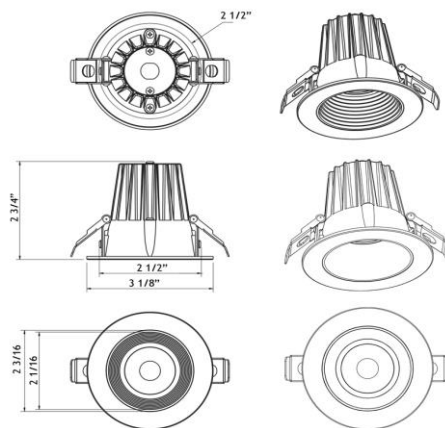

ACCESSORIES

Sold Separately



[Flanged Mounting Plate with bars model FRP212](#)

[Flat Mounting Plate 26" model RIP212](#)

[Flat Mounting Plate 13" model MP234](#)

[Jumper Cables 10 ft model JC-5CCT-10](#)

[Goof Ring OD 4 1/2" White GR3 / Black GR3-BK](#)

Emergency Back Up Drivers

[model # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON