


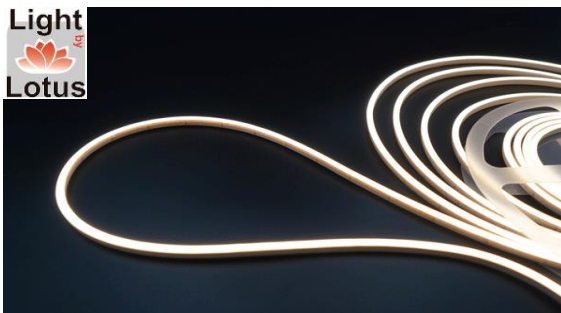

DESCRIPTION

Super Slim neonflex LED for architectural applications
 1/8" wide by 3/16" high (4 x 6 mm) allows for creative & original results
 Seamless linear light - no diffused cover needed
 Horizontally Bendable
 No aluminum channel needed
 No hotspots and with CRI 90+ for vibrant colors
 Wires on both ends
 Waterproof IP67
 Suitable for installation within a clothes closet storage space

INSTALLATION INSTRUCTIONS

1. Recessed:

- Cut 1/8" wide by 3/16" high (4 x 6 mm) channel in the surface you would like to mount the recessed neonflex into
 - Push in the recessed neonflex inside
 Note that the end caps are slightly larger - by 1 mm on each side

2. Surface mount side lit:

- mount double adhesive tape on the printed side and stick to smooth surface
 Double adhesive tape is not included

3. You may cut it once and use the wires on both ends to power the pieces.
 Cut on trim marks every 1"

SEALING CUTS REQUIREMENTS

Do not use acidic or ketoxime-based adhesives when sealing cuts.
 Such adhesives can damage or corrode the strip surface.
 Use only alcohol-based, neutral-cure sealant.
 LED strips may be cut only at designated cut marks.

Minimum Bending Diameter: 2 3/8" (60 mm) Horizontal Direction Only



ORDERING GUIDE

ES-FS2216C-266-24-Y-3K

In stock 3000K 16ft length

ES-FS2216C-266-24-Y-3K

Mini Neonflex 4x6 mm LED 24V 3W/ft IP67

Project:

Location:

Qty:

Notes:

SPECIFICATION (tolerance +/- 10%)	
Applications	Recessed or Surface Mount Cabinet & Furniture
Power	3 W/ft (10 W/m)
Input	24V DC
Stock CCT	3000 K
Light output per foot	110 lm
Efficiency	36 lm/W
CRI	90 +
Available Lengths	16 ft
Maximum Connection Length	16 ft
Dimensions	1/8" x 3/16" (4 mm x 6 mm)
Beam Angle	110°
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 67
Approved Locations	Wet Location, Closet Rated
Operating Temperature	-4°F (-20°C) to +113°F (+45°C)
Cuttable Increment	1" (26 mm)
Minimum Bending Diameter	4" (100mm) Horizontal
Projected Life	70% Light Output at 50,000 Hours
Certification	c UL us
Warranty	5 year indoor / 3 year outdoor - when installed with a Lotus LED Lights driver
	The warranty is void if installed with an LED driver from another manufacturer



RECOMMENDED DRIVERS

[KVG-24030-DWJ](#)

[KVG-24060-DWJ](#)

[KVG-24096-DWJ](#)

[KVG-C24192-DWJ](#)

[KVG-C24288-DWJ](#)

[SDD-24060-DIM](#)

[SDD-24096-DIM](#)



30W 5-in-1 Dimmable

60W 5-in-1 Dimmable

96W 5-in-1 Dimmable

192W 5-in-1 Dimmable

288W 5-in-1 Dimmable

60W 2-in-1 driver + dimmer

96W 2-in-1 driver + dimmer

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090

Delta BC & Mississauga ON