



**Wet & Air-Tight**

#### DESCRIPTION


4" J-Box Mount LED fixtures with integral LEDs  
Built-in Driver and Twist & Lock Cover

#### FEATURES & BENEFITS

1" Deep - Fits In 1 1/2" Deep J-Box  
Fast & Easy To Install - Save On Labor  
CRI 90+ for True Colour Rendering  
IP54 Wet Location Rated - Suitable For Showers & Soffits

#### MOUNTING

Connect The Wires In The Previously Installed Junction Box.  
Quick Connectors Included.  
Screw The Fixture Into The J-Box.  
Push The Face Plate Against The Fixture By Placing  
The Hooks Into The Four Openings,  
Then Turn Clockwise To Tighten And Lock In Place.

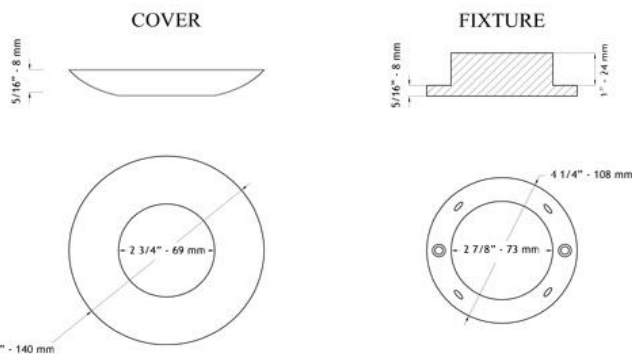

#### AVAILABLE TRIMS




#### ORDERING GUIDE Example: LL4RBX - 30K - WH

|               | CCT        | Trim Finish |                |
|---------------|------------|-------------|----------------|
| <b>LL4RBX</b> | -          | -           |                |
| 2700K         | <b>27K</b> | <b>WH</b>   | White          |
| 3000K         | <b>30K</b> | <b>BK</b>   | Black          |
| 4100K         | <b>41K</b> | <b>BN</b>   | Brushed Nickel |



Emergency Back Up Drivers  
[model # BLD-HM15D-YYY - non-dimmable](#)

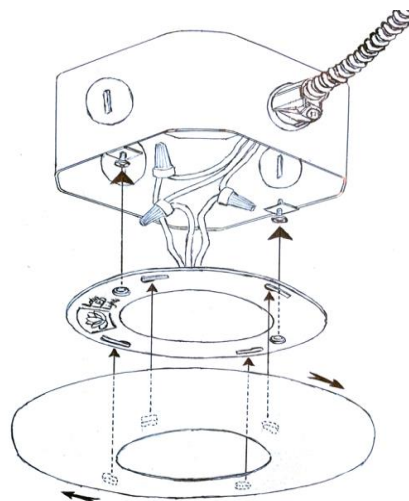

## LL4RBX

### 4" J-Box Mount LED 11W

Project:

Location:

Model #:

Qty:

Notes:

| SPECIFICATION        |                                  |          |      |      |
|----------------------|----------------------------------|----------|------|------|
| Applications         | J-Box Ceiling Mount, Showers     |          |      |      |
| Energy Used          | 11 W                             |          |      |      |
| Colour Temperature K | 2700                             |          | 3000 | 4100 |
| Light Output lm      | 620                              |          | 630  | 650  |
| Halogen Equivalent   | 60 W                             |          |      |      |
| Beam Angle           | 110°                             |          |      |      |
| CRI                  | 90 +                             |          |      |      |
| Input Voltage        | 120V AC                          | 50/60 Hz |      |      |
| Power Factor         | 0.95                             |          |      |      |
| Approved Location    | Wet & Damp Locations             |          |      |      |
| IP Rating            | IP 54                            |          |      |      |
| Air Tight            | Yes                              |          |      |      |
| Ambient Temperature  | -40°F (-40°C) to +104°F (+40°C)  |          |      |      |
| Projected Life       | 70% Light Output at 50,000 Hours |          |      |      |
| Certification        | cULus                            |          |      |      |
| Warranty             | 5 Year                           |          |      |      |

**Lotus LED Lights USA**  
250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ & Ferndale WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)  
mailing addresses  
warehouses

**Lotus LED Lights CANADA**  
1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
Delta BC & Mississauga ON