

**LL4R****4" Round Ultimate Super Thin Recessed LED 13.5W****Type IC, Wet & Air-Tight****DESCRIPTION**

4" Round Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Wider Trim - No Goof Rings Needed For Covering Old 4" Holes
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required
CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

DIMENSIONS : ID 4 1/8" OD 5 1/4" Cut Out 4 1/4" to 4 1/2"

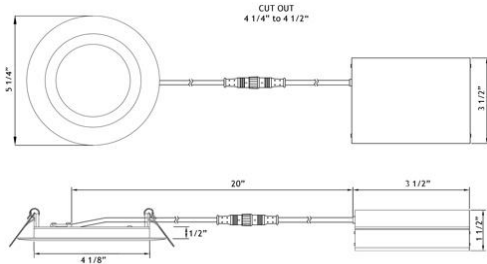

120V TRIAC Dimmable

Driver Included

Optional 120V - 347V

Driver 0-10V Dimmable

Order Separately as
[model # LLL-LD1535T](#)

**ORDERING GUIDE**Example: **LL4R - 30K - WH**

	CCT	Trim Finish	
LL4R	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K	BN	Brushed Nickel
5000K	50K	BC	Brushed Copper
DTW 28-20	28K	Dim to Warm 2800K to 2000K	WH Trim Only
DTW 35-20	35K	Dim to Warm 3500K to 2000K	WH Trim Only

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits
Energy Used	13.5 W
Colour Temperature	2700 3000 4000 5000 DTW 28-20 DTW 35-20
Light Output	750 760 800 850 750 760
Halogen Equivalent	75 W
Beam Angle	110°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet & Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, T24
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS

White

Black

Brushed Nickel

Brushed Copper

ACCESSORIES**Sold Separately**

Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)[20ft - model # EXC20](#)[13" Mounting Plate Flat model # MP4-2](#)[13" Mounting Plate Flanged model # MP4](#)[26" Flat Rough-In Plates model # RIP412](#)[Flanged Plate with Hanger Bars model # FRP412](#)

Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dim](#)[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON