

**LE4RR****4" Round Deep Regressed Eco LED 11W**

Project: _____

Location: _____

Model #: _____

Qty: _____

Notes: _____

DESCRIPTION

4" Round Deep Regressed LED With Integral Driver In Connection Box
Builder Grade Fixture Providing Pleasant Low Glare Light

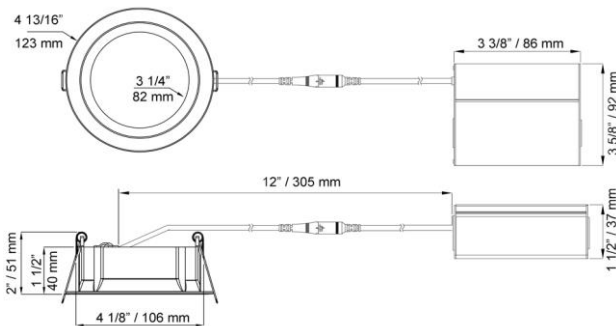
FEATURES & BENEFITS

1 1/8" Regressed for Reduced Glare
5CCT User Selectable 2700-3000-3500-4000-5000K in WH & BK trims
Dim To Warm 3000K to 2000K in WH trim in stock
Up to 1030 lm with CRI 90+
Driver Inside Connection Box - No Junction Box Needed
Type IC, Air-Tight and Wet Location Rated - No Housing Needed

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required 2"

DIMENSIONS: ID 4 1/8" OD 4 13/16" Cut Out 4 1/8" to 4 1/4"

**AVAILABLE TRIMS**

White



Black

ORDERING GUIDE**CCT****Trim**

LE4RR-5CCT-WH
LE4RR-3020K-WH
LE4RR-5CCT-BK

5 CCT
Dim To Warm
5 CCT

[White](#) [Spectrum](#)
[White](#) [Spectrum](#)
[Black](#) [Spectrum](#)

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits					
Power	11 W					
Colour Temperature	2700	3000	3500	4000	5000	DTW 30-20K
Light Output White Trim	975	1000	1033	1030	977	810
Light Output Black Trim	708	718	736	732	709	
Beam Angle	90°					
CRI	90 +					
Default Driver Input	120V AC			Triac Dimmable		
Optional Driver Input	120V-347V AC			0-10V Dimmable		
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG					
Approved Location	Insulated Ceiling & Wet Locations					
IP Rating	IP 54					
Air Tight & Type IC	Yes					
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)					
Projected Life	70% Light Output at 36,000 Hours					
Certification	c UL us					
Warranty	5 Year					

120V TRIAC Dimmable

Driver Included



Optional 120V - 347V

Driver 0-10V Dimmable

Order Separately as

[model # LLL-LD1535ET](#)

(for DTW model CCT to be at 2700K)

ACCESSORIES[4 1/8" Hole Flanged with Hanger Bars model # FRP4](#)[26" Long Flat Rough-In Plate model # RIP414](#)[13" Long Flat Rough-In Plate model # MP4-2](#)[13" Long Flanged Rough-In Plate model # MP4](#)

Low Voltage Extension Cables 10 ft FT4 / CMR rated
[model # EXC10-5CCT](#)



Goof Ring OD 5 3/4"

[White model # GR4](#) [Black model # GR4-BK](#)

Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dim](#)[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus genuine product

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON