



LED-6-S12W-5CCTWH-SQ

6" Square Super Slim Budget LED 12W 5CCT

Project:

Location:

Model:

Qty:

Notes:

DESCRIPTION

6" Square Super Slim Budget LED With Integral Driver In Connection Box

FEATURES & BENEFITS

1/2" Deep - Install directly under joist

Type IC Rated - No Housing Required



Driver Inside Connection Box - No Junction Box Needed

5 CCT filed selectable 2700K to 5000K

DIMENSIONS

ID 6" OD 6 7/8" Square Cut Out 6 1/8" to 6 1/4"

Fixture Thickness: 1/2"

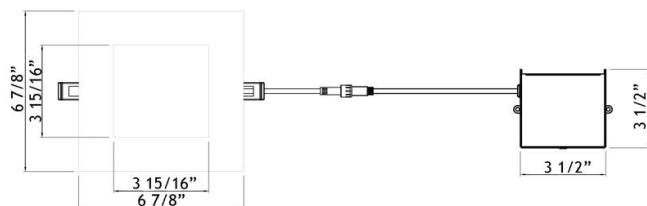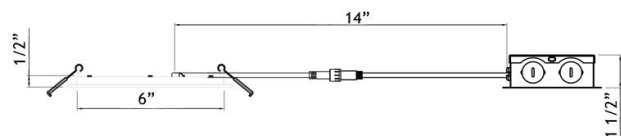

120V Triac Dimmable Driver Included



ORDERING GUIDE

LED-6-S12W-5CCTWH-SQ

Stock trim - White. Other Trim Colors Available By Custom Order

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	12 W
Color Temperature (K)	5 CCT: 2700 3000 3500 4000 5000
Light Output (lm)	890 1000 1030 1050 1010
Halogen Equivalent	100 W
Beam Angle	110°
CRI	80
Default Driver Input & Dimming	120V AC 50/60 Hz - Triac Dimmable
Optional Driver Input & Dimming	120V-347V AC 50/60 Hz - 0-10V Dimmable
Junction Box Volume	9.69 cubic inches / Max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year

ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP6-2](#)



[26" Flat Rough-In Plates model # RIP6](#)



[Flanged Plate with Hanger Bars - model # FRP6](#)



[Jumper Cable 10 ft model # JC-5CCT-10](#)



[0-10V Driver 120-347V model # HBL012-AW-10-01A-5CS](#)



Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)

[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WA

www.LotusLEDlights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON