

**Type IC, Wet & Air-Tight****DESCRIPTION**

8" Round Recessed LED With Integral Driver In Connection Box

FEATURES & BENEFITS

5CCT user selectable 2700-3000-3500-4000-5000K

1/2" Thin - Install Directly Under Joists

Maximum Layout Flexibility

Driver Inside Connection Box - No Junction Box Needed

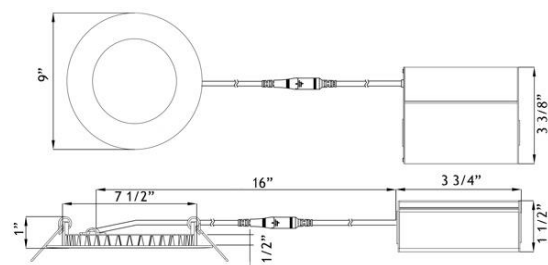
Fast & Easy To Install - Save On Labor

Type IC Rated - No Housing Required

Available in 6 Pack for additional savings

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

DIMENSIONS: ID 7 1/2" OD 9" Cut Out 7 1/2" to 8"

120V TRIAC Dimmable

Driver Included



Optional 120V - 347V

Driver 0-10V Dimmable

Order Separately as

[model # LLL-LD2050ET](#)**ORDERING GUIDE****LE8R-5CCT-WH**

Trim

[White](#)

Packaging

Individually packaged, 10 per case

LE8R-5CCT-WH-6P[White](#)

6 pack per box, 4 boxes per case total 24 fixtures

In stock is White trim. Black is available as custom

LE8R-5CCT**8" Round Economy Recessed 5CCT LED 18W**

Project:

Location:

Model #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits				
Energy Used	18 W				
Colour Temperature	2700		3000		3500 4000 5000
Light Output	1340		1430		1510 1560 1520
Beam Angle	110°				
CRI	90 +				
Default Driver Input	120V AC		Triac Dimmable		
Optional Driver Input	120V-347V AC		0-10V Dimmable		
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG				
Power Factor	0.98				
Approved Location	Insulated Ceiling, Wet & Damp Locations				
IP Rating	IP 54				
Air Tight	Yes				
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)				
Projected Life	70% Light Output at 36,000 Hours				
Certification	c UL us				
Warranty	5 Year				

ACCESSORIES

Sold Separately

[26" Long Flat Rough-In Plate model # RIP8](#)Low Voltage Extension Cables 10 ft FT4 / CMR rated
[model # EXC10](#)[Goof Ring White OD 9 1/2" model # GR8](#)[Goof Ring White OD 10 1/2" model # GR810](#)

Emergency Back Up Drivers

[for 0-10V drivers # BLD-HM08D-YYY - 0-10V dimmable](#)
[for triac drivers # BLD-HM15D-YYY - non-dimmable](#)**Lotus LED Lights USA**250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ & Ferndale WAwww.LotusLEDLights.commailing addresses
warehouses**Lotus LED Lights CANADA**1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON