



**Type IC, Wet & Air-Tight**

#### DESCRIPTION

2" 24V DC Input Eyeball Round Recessed Gimbal LED  
With DC Module For Regulating The Voltage & Current  
Unique & Patented Design:  
Gimbal Yet Air-Tight Without Housing Needed


#### FEATURES & BENEFITS

1 1/2" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
Fast & Easy To Install - Save On Labor  
Directional Beam - Great for Sloped Ceilings and Artwork  
CRI 90+ for True Color Rendering

#### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening  
With Attached Spring Clips  
Ceiling Clearance Required: 1 1/2"

**DIMENSIONS:** ID 2" OD 2 1/2" Cut Out 2" to 2 1/2"

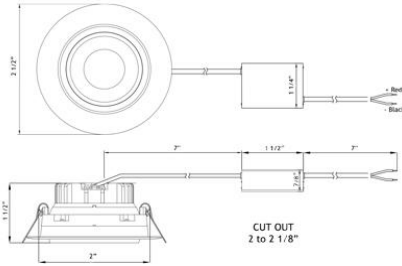

#### DC Module Included



**ORDERING GUIDE** Example: **LL2G24V - 30K - WH**

|                | CCT        | Trim Finish |                                |
|----------------|------------|-------------|--------------------------------|
| <b>LL2G24V</b> | -          | -           |                                |
| 2700K          | <b>27K</b> | <b>WH</b>   | <a href="#">White</a>          |
| 3000K          | <b>30K</b> | <b>BK</b>   | <a href="#">Black</a>          |
| 4100K          | <b>41K</b> | <b>BN</b>   | <a href="#">Brushed Nickel</a> |

## LL2G24V

### 2" 24V Eyeball Round Recessed Gimbal LED 5W

Project:

Location:

Cat #:

Qty:

Notes:

#### SPECIFICATION

|                     |                                                                                |      |      |
|---------------------|--------------------------------------------------------------------------------|------|------|
| Applications        | Cabinets, Recessed Alcoves                                                     |      |      |
| Energy Used         | 5 W                                                                            |      |      |
| Color Temperature   | 2700                                                                           | 3000 | 4100 |
| Light Output        | 380                                                                            | 400  | 430  |
| Halogen Equivalent  | 35 W                                                                           |      |      |
| Beam Angle          | 24° Beam with 20° tilt and 360° rotation                                       |      |      |
| CRI                 | 90 +                                                                           |      |      |
| Input               | 24V DC                                                                         |      |      |
| Dimming             | Not Dimmable                                                                   |      |      |
| Approved Location   | Insulated Ceiling & Wet Locations                                              |      |      |
| IP Rating           | IP 54                                                                          |      |      |
| Air Tight           | Yes                                                                            |      |      |
| Ambient Temperature | -40°F (-40°C) to +104°F (+40°C)                                                |      |      |
| Projected Life      | 70% Light Output at 50,000 Hours                                               |      |      |
| Certification       | cULus                                                                          |      |      |
| Warranty            | 3 year - when installed with a Lotus LED Lights Driver                         |      |      |
|                     | The warranty is void if installed with an LED driver from another manufacturer |      |      |

#### ACCESSORIES

Sold Separately

Compatible drivers

96W Class 2 Driver

[model LBL-DC24V96W](#)

96W Mini Electronic Transformer

[model ETF24096TD](#)

[Rough-In Plates - model # RIP2](#)

#### AVAILABLE TRIMS



White



Black



Brushed Nickel

#### COMPLIANCE



**Type IC  
Air-Tight**

#### Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ & Ferndale WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

#### Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
Delta BC & Mississauga ON